

CANLink[®] CL-423-105 Module Master I/O Module



Representative Product Photo

10 Inputs and 4 Outputs including:

- (3) switch to battery inputs
- (3) 0-5.5VDC 10-bit analog inputs
- (4) inputs software configurable as switch to ground or frequency inputs
- (4) 3A PWM outputs with estimated current feedback
- (1) USB Port
- (1) J-1939 CAN port

The CL-423 is a solid-state microprocessor based module and member of the HED[®] CANLink[®] multiplexed control family. Delivered in a Deutsch enclosure, this unit provides a high density I/O count in a compact and economical package.

Designed for use as a stand alone unit or as part of a distributed system, the CL-423 is also available in a clear enclosure with LED indicators for each input for simple troubleshooting in the field.


The HED[®] CL-423 can be programmed using HED[®]'s do-it-yourself CANLink[®] Composer[™] programming tool or directly by HED[®] engineering, and is designed for use with the CANLink[®] Conductor[™] software tool for diagnostics and field troubleshooting.

Specifications	
Enclosure:	Deutsch standard EEC-325x4 PCB enclosure with 24-pin receptacle.
Mating Connectors: Deutsch	DTM06-12SA DTM06-12SB WM-12S (wedge) – Two needed (one per connector) 0462-201-20141 20AWG sockets 0413-204-2005 Sealing Plugs – Unused pins are required to be sealed to maintain module sealing
Operating Voltage Range:	8-32 VDC
Operating Temperature:	-40°C to 70°C
Storage Temperature:	-40°C to 85°C
IP Rating:	IP 6K9K (intended for either interior or exterior installation)
PC Boards:	The printed circuit boards are designed for high EMI/RFI protection. The boards are conformal coated with a silicone coating for further water/moisture protection. All inputs and outputs are protected against shorts to Battery(+) or Battery(-). 100% of the boards are functionally tested before shipment. * Harness codes are switch to ground inputs used to identify I/O module location and function to the master controller

CL-423-105 Master I/O Module

CL-423-105 Master I/O Module Pinout

DTM13-12PA (Gray)		DTM13-12PB (Black)	
Pin	Function	Pin	Function
1	BAT(-) Module	1	Output #4 DOUT(+)/PWM(+)/ECC(+)(3A)
2	Input #1 STB	2	Input #5 AIN
3	Input #2 STB	3	Input #6 AIN
4	Input #3 STB	4	Input #7 STG/Freq
5	CAN-L	5	Input #8 STG/Freq
6	CAN-H	6	Input #9 STG/Freq
7	Input #4 STG/Freq	7	Input #10 AIN
8	Output #1 DOUT(+)/PWM(+)/ECC(+)(3A)	8	Shield
9	BAT(+) Outputs 1, 2	9	USB (DM)
10	Output #2 DOUT(+)/PWM(+)/ECC(+)(3A)	10	USB (DP)
11	Output #3 DOUT(+)/PWM(+)/ECC(+)(3A)	11	Unused
12	BAT(+) Module and Output 3, 4 / Input #11 Battery Voltage	12	Unused

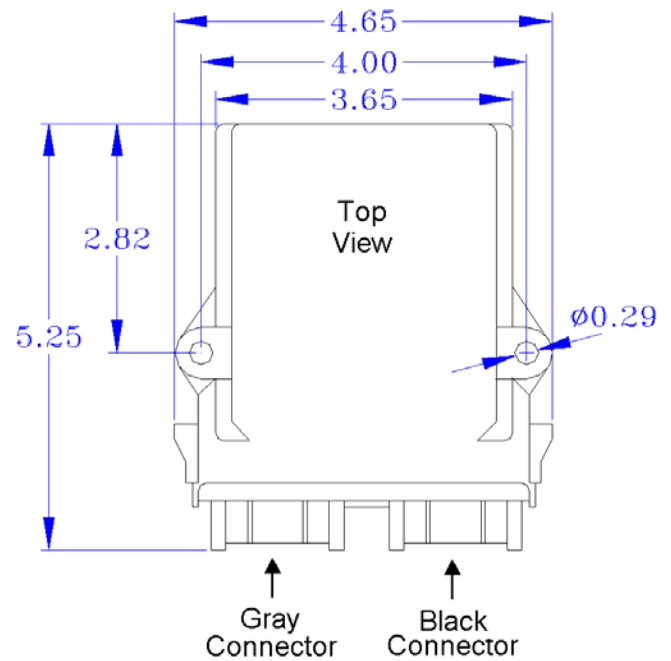

Note: Above pinout is for HED[®] part number CL-423-105.
Additional part number data sheets available on HED[®] website.

